
DENTIFICATION SPECIFICATION SHEET

Arrow Banding Tape ANSI/ASME 2020 Standards

Identification Depot Arrow Banding Tape is the preferred method for installing adhesive pipe markers and meeting standards for marking directional flow. The permanent pressure sensitive adhesive easily attaches to clean dry surfaces. The tape provides 360 degree visibility around pipes and extra adhesion to pipes in any condition.



Identification Depot Style	Pipe OD (Including Insulation)		Tape Size	Arrow Size	
1" A (25.4mm)	.7" - 1.3"	18 - 33mm	1" X 30 YARDS (25.4mm x 27.43m)	.5"	13mm
1" B (25.4mm)	1.4" - 2.4"	34 - 61mm	1" X 30 YARDS (25.4mm x 27.43m)	.7"	19mm
2" C (50.8mm)	2.5" - 6.7"	62 - 170mm	2" X 30 YARDS (50.8mm x 27.43m)	1.3"	32mm
3" D (76.2mm)	6.8" - 10"	171 - 254mm	3" X 30 YARDS (76.2mm x 27.43m)	2.5"	64mm
4" E (101.6mm)	Over 10"	Over 254mm	4 " X 30 YARDS (101.6mm x 27.43m)	3.5"	89mm

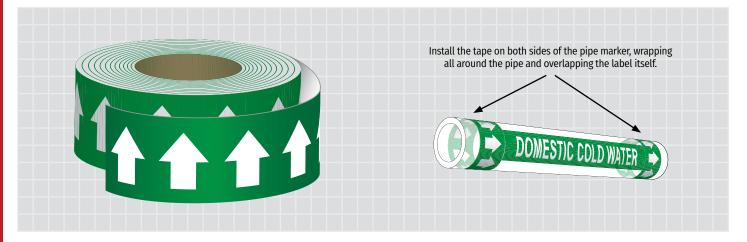

Standards Met	ANSI/ASME A13.1-2020 "Scheme for Identification of Piping Systems" ANSI Z535.1 "Safety Color Code"				
Installation Instructions	Applied to a clean dry surface above 32°F (0°C)				
Service Temp	-40°F to 176°F (-40°C to 82.22°C)				
Water Resistance	Good, product has passed submersion tests				
Finish	High gloss				
Material Properties	4 mil vinyl with pressure sensitive adhesive backing				
	Aggressive permanent acrylic adhesive				
Adhesive Properties	Stainless Steel: 54 oz/in (594 N/m) Acrylic: 56 oz/in (616 N/m)		Glass: 53 oz/in (599 N/m)		
	Polypropylene: 51 oz/in (561 N/m)	Expected Shear: 5 hours	Tack: gm (740)		
Ink Properties	Inks resistant to fading with UV exposure, Semi-Gloss Finish				
Storage Stability	2 years stored at 70°F (21°C) and 50% RH				
Outdoor Durability	4 to 6 years				
Abrasion Resistance	Good				
Chemical Resistance	Resistant to Acids, Alkalis and Salts				
Equivalent To	Marking Services MS-900 Arrow Tape, Seton Arrows-On-a-Roll Tape, Brimar EZ Arrow banding tape, Brady Arrow Tape				

DATE		/		JOB		
	MM	DD	YYYY			
CONTRAC	CTOR NAME _					